


## Product Data Sheet (2019-07-19)

### Flexvent Top

The compact, proven design has high efficiency and guaranteed operation for heating and air conditioning.

The water within the installation contains air which can form corrosion and reduce the thermal transfer. A Flexvent is fitted at places where the air collects.

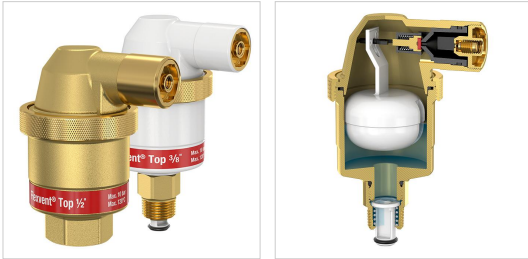

Type	Dimensions		Connection	Shut-off valve	###	Order Code
	Ø [mm]	H. [mm]				
<b>Flexvent Top</b>	54	86	Rp 1/2"	no	20	28515
<b>Flexvent Top White</b>	54	86	R 3/8"	yes	20	28510

### Advantages

- Most types are equipped with a shut-off valve for easy fitting and dismantling.
- A Flexvent float vent is easy to fit in any installation due to its very small dimensions.
- The relatively large air cushion at the top of each type of Flexvent float vent protects the valve seat sufficiently against contamination, so that the Flexvent will not leak.
- To guarantee top quality, we test all Flexvents before they leave our facility!

### Technical information

- Minimum/Maximum working temperature: -10 °C / 120 °C.
- Minimum/Maximum working pressure: 0.2 / 10.0 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.

### Find more information online:

[Manuals](#)  
[Certificates](#)  
[CAD drawings](#)  
[Extra documentation](#)

Flamco Group  
Plotterweg 31  
3821 BB, Amersfoort - nl  
**T** +31 33 299 75 00  
**F** +31 33 298 64 45  
**E** [info@flamcogroup.com](mailto:info@flamcogroup.com)  
**I** <https://flamcogroup.com>