


## Product Data Sheet (2019-06-15)

### Flamcovent Clean IsoPlus

This insulation set for Flamcovent Clean (Smart) can be easily attached and consists of two halves that lock into each other by means of hook fasteners and deep-drawn synthetic caps. The melamine insulation foam (thickness 50 mm) is glued to the polystyrene outer jacket (thickness 1 mm).

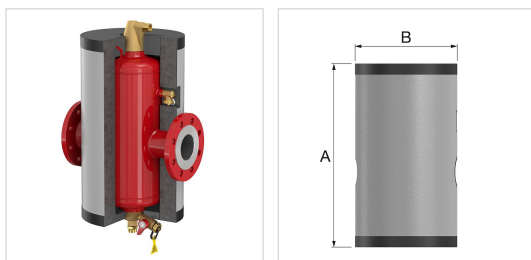


Type	Dimensions		Weight [kg]	###	Order Code
	A [mm]	B [mm]			
<b>Flamcovent Clean IsoPlus 50</b>	502	280	1.4	1	28860
<b>Flamcovent Clean IsoPlus 65</b>	502	280	1.5	1	28861
<b>Flamcovent Clean IsoPlus 80</b>	694	380	2.3	1	28862
<b>Flamcovent Clean IsoPlus 100</b>	694	380	2.4	1	28863
<b>Flamcovent Clean IsoPlus 125</b>	866	470	3.5	1	28864
<b>Flamcovent Clean IsoPlus 150</b>	866	470	3.6	1	28865
<b>Flamcovent Clean IsoPlus 200</b>	1178	560	5.5	1	28866

### Advantages

- Suitable for retrospective installation.
- 100% recyclable.

### Technical information

-  -value: 0.035 W/mK. <>
- Fire class B2 according to DIN 4102.
- Colour: aluminium coloured (RAL 9006).

**Find more information online:**

[Manuals](#)

[Extra documentation](#)

Flamco Limited  
Washway Lane  
WA10 6PB, St Helens, Merseyside - gb  
**T** 017 447 447 44  
**F** 017 447 447 00  
**E** [info@flamco.co.uk](mailto:info@flamco.co.uk)  
**I** [flamcogroup.com/uk-en](http://flamcogroup.com/uk-en)