

03

## YSP-5 Type Steam Trap

As a disc type trap, this product guarantees perfect operations and features parts that are all made of highly durable stainless steel. Because it has a built-in bimetal, there is no air binding and no concern of freezing damages.



### Features


- Built-in bimetal preventing air binding.
- Built-in strainer preventing malfunctioning caused by foreign substances.
- Made of stainless steel : outstanding durability and a high degree of hardness.

### Specifications

Type		YSP-5
Applicable pressure		0,01~0,8, 0,03~1,6MPa
Fluid temperature		220°C Below
End connection		KS PT SCREW
Materials	Body	STS
	Disc, seat	STS
Hydraulic test pressure		1,5 times of applicable flange rating


▶ Install a strainer (80 MESH or more) at the front end when installing the valve.

### Dimensional drawing



### Dimensions

Type	Size	L	H1	H2	Weight (kg)
YSP-5 Type	15(1/2")	65	30	55	1,0
	20(3/4")	65	30	55	1,0
	25(1")	65	30	55	1,2

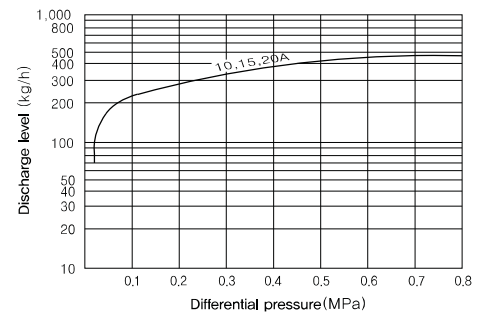

## YSP-6 Type Steam Trap

### Features

- Compact & lightweight : easy to install.
- Superb discharge performance & a long life span.
- Made of stainless steel : a high degree of hardness & corrosion-free.

### Specifications

Type		YSP-6
Applicable pressure		0,01~1,6MPa
Fluid temperature		220°C below
End connection		KS PT SCREW
Materials	Body	STS
	Disc, seat	STS
Hydraulic test pressure		2,4MPa

▶ Install a strainer (80 MESH or more) at the front end when installing the valve.

### Dimensions

Size	L	H1	H2	Weight (kg)
8(1/4")	40	13	32	0,23
10(3/4")	40	13	32	0,23

### Dimensional drawing

