

Product Data Sheet (2019-07-07)

Flamcovent Clean Smart S - 10.0 bar

Optimum air and dirt separation combined with energy efficiency.


For use in sealed heating and cooling systems.

Air and dirt separators protect the boilers, pumps and fittings from damage caused by the deposit of dirt particles, increase comfort and improve the yield. Air and dirt separators also offer benefits in the event of application in old systems or when an open system is converted to a closed system.

- Increases comfort and yield.
- Prevents deposit of dirt particles in the boiler.
- The removal of air and dirt from the system water extends the service life of pumps, control equipment and other system accessories.

The new steel Flamcovent Clean Smart air and dirt separators remove even the tiniest microbubbles and minuscule dirt particles from the system water. The Flamco Clean Smart performs 60% better than conventional air and dirt separators whilst the flow resistance has been reduced to a negligible level.

- Including a welded connection.

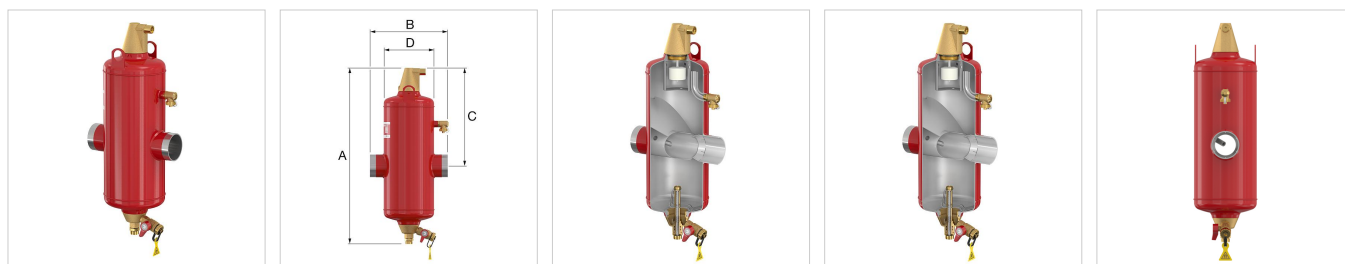

Type	Capacity [l]	Connection		Dimensions				K _v * [m ³ /h] (ΔP = 1 bar)	Weight [kg]	###	Order Code
		[DN]	[mm]	A [mm]	B [mm]	C [mm]	D [mm]				
Flamcovent Clean Smart 50 S	10	50	60.3	603	260	338	175	93	11	1	31141
Flamcovent Clean Smart 65 S	10	65	76.1	603	260	338	175	140	11	1	31142
Flamcovent Clean Smart 80 S	33	80	88.9	795	370	435	270	209	20	1	31143
Flamcovent Clean Smart 100 S	33	100	114.3	795	370	435	270	311	23	1	31144
Flamcovent Clean Smart 125 S	78	125	139.7	967	525	510	360	459	42	1	31145

Type	Capacity [l]	Connection		Dimensions				K _v * [m ³ /h] (ΔP = 1 bar)	Weight [kg]	###	Order Code
		[DN]	[mm]	A [mm]	B [mm]	C [mm]	D [mm]				
Flamcovent Clean Smart 150 S	78	150	168.3	967	525	510	360	675	47	1	31146
Flamcovent Clean Smart 200 S	158	200	219.1	1280	650	705	450	1340	63	1	31147
Flamcovent Clean Smart 250 S	370	250	273.0	1620	850	892	600	1952	132	1	31148

* $K_v = Q / \sqrt{\Delta P}$ Q: Flow [m³/h] ΔP: Pressure loss over the product [bar]

Flow factor K_v: Rate of flow [m³/h] which results in a 1 bar pressure drop across the product. This is different then the maximum allowed flow rate of the product.





Advantages

- Up to 60% better performance compared to conventional air and dirt separators.
- Extremely low flow resistance resulting in less energy consumption.
- Standard flow speed up to 3 m/s.
- Twenty-five neodymium supermagnets are incorporated into the dirt scraper.
- Constant performance during the entire lifespan.
- Low maintenance.

Technical information

- Maximum working pressure: 10 bar.
- Suitable for systems with a maximum flow temperature of 120 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with Pressure Equipment Directive 2014/68/EU.

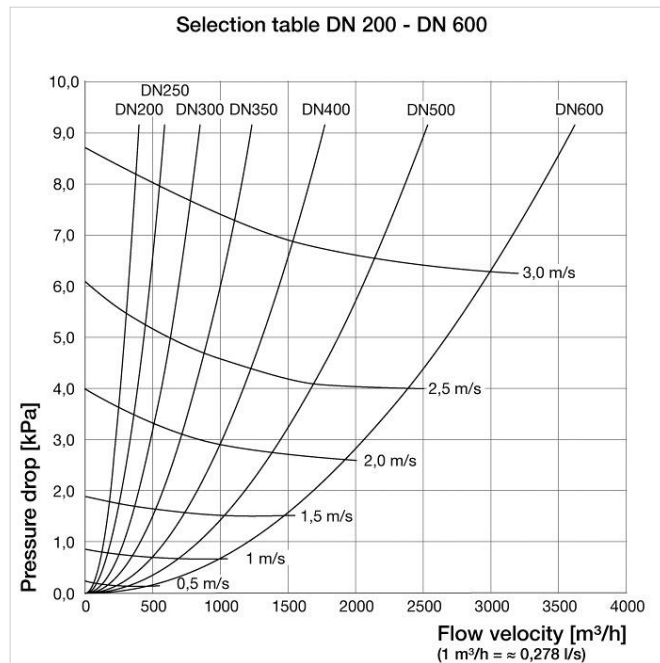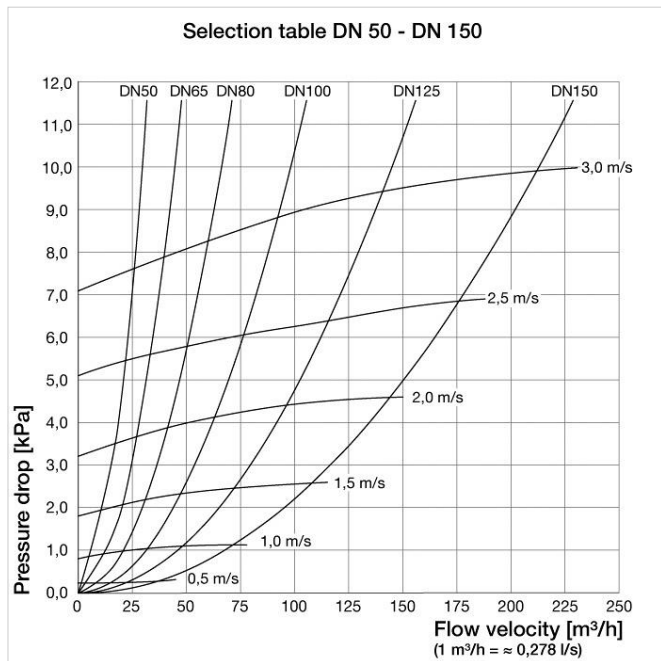

Find more information online:

[Manuals](#)
[Certificates](#)
[CAD drawings](#)
[Extra documentation](#)
[Animations](#)

Flamco Group
 Plotterweg 31
 3821 BB, Amersfoort - nl
T +31 33 299 75 00
F +31 33 298 64 45
E info@flamcogroup.com
I <https://flamcogroup.com>