


Product Data Sheet (2020-08-04)
Flexcon Top 110 - 1000

High pressure alternative for use in sealed heating installations (acc. to EN12828) and chilled water (cooling) installations.

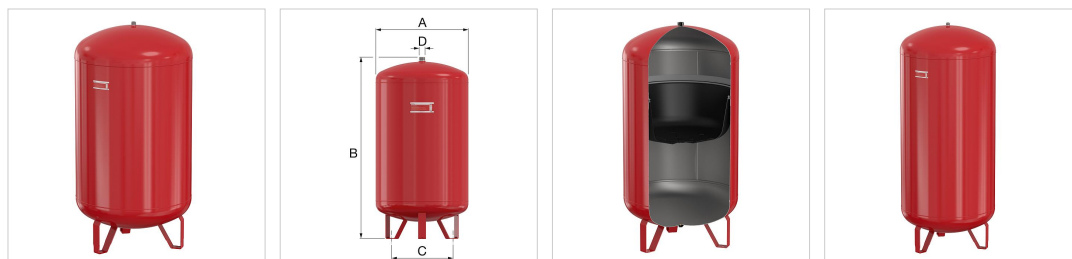

Type	Capacity [l]	Pre-charge [bar]	Dimensions			Syst. conn. (D)	Weight [kg]	###	Order Code
			A [mm]	B [mm]	Ø C [mm]				
Flexcon Top 110 - 1.5 bar	110	1.5	484	784	360	R 1"	27.3	8	16103
Flexcon Top 110 - 3.0 bar	110	3.0	484	784	360	R 1"	27.3	8	16106
Flexcon Top 110 - 3.5 bar	110	3.5	484	784	360	R 1"	27.3	8	16090
Flexcon Top 110 - specify	110	*	484	784	360	R 1"	27.3	8	16100
Flexcon Top 140 - 1.5 bar	140	1.5	484	950	360	R 1"	31.6	8	16133
Flexcon Top 140 - 3.0 bar	140	3.0	484	950	360	R 1"	31.6	8	16136
Flexcon Top 140 - 3.5 bar	140	3.5	484	950	360	R 1"	31.6	8	16091
Flexcon Top 140 - specify	140	*	484	950	360	R 1"	31.6	8	16130
Flexcon Top 200 - 1.5 bar	200	1.5	600	960	450	R 1"	35.4	8	16193
Flexcon Top 200 - 3.0 bar	200	3.0	600	960	450	R 1"	35.4	8	16196
Flexcon Top 200 - 3.5 bar	200	3.5	600	960	450	R 1"	35.4	8	16092
Flexcon Top 200 - specify	200	*	600	960	450	R 1"	35.4	8	16190
Flexcon Top 300 - 1.5 bar	300	1.5	600	1330	450	R 1"	57.1	6	16293
Flexcon Top 300 - 3.0 bar	300	3.0	600	1330	450	R 1"	57.1	6	16296
Flexcon Top 300 - 3.5 bar	300	3.5	600	1330	450	R 1"	57.1	6	16093
Flexcon Top 300 - specify	300	*	600	1330	450	R 1"	57.1	6	16290

Type	Capacity [l]	Pre-charge [bar]	Dimensions			Syst. conn. (D)	Weight [kg]	###	Order Code
			A [mm]	B [mm]	Ø C [mm]				
Flexcon Top 425 - 1.5 bar	425	1.5	790	1180	610	R 1"	84.9	1	16413
Flexcon Top 425 - 3.0 bar	425	3.0	790	1180	610	R 1"	84.9	1	16416
Flexcon Top 425 - 3.5 bar	425	3.5	790	1180	610	R 1"	84.9	1	16094
Flexcon Top 425 - specify	425	*	790	1180	610	R 1"	84.9	1	16410
Flexcon Top 600 - 1.5 bar	600	1.5	790	1540	610	R 1"	105.8	1	16593
Flexcon Top 600 - 3.0 bar	600	3.0	790	1540	610	R 1"	105.8	1	16596
Flexcon Top 600 - 3.5 bar	600	3.5	790	1540	610	R 1"	105.8	1	16096
Flexcon Top 600 - specify	600	*	790	1540	610	R 1"	105.8	1	16590
Flexcon Top 800 - 1.5 bar	800	1.5	790	1888	610	R 1"	133.7	1	16793
Flexcon Top 800 - 3.0 bar	800	3.0	790	1888	610	R 1"	133.7	1	16796
Flexcon Top 800 - 3.5 bar	800	3.5	790	1888	610	R 1"	133.7	1	16098
Flexcon Top 800 - specify	800	*	790	1888	610	R 1"	133.7	1	16790
Flexcon Top 1000 - 1.5 bar	1000	1.5	790	2268	610	R 1"	155.1	1	16893
Flexcon Top 1000 - 3.0 bar	1000	3.0	790	2268	610	R 1"	155.1	1	16896
Flexcon Top 1000 - 3.5 bar	1000	3.5	790	2268	610	R 1"	155.1	1	16099
Flexcon Top 1000 - specify	1000	*	790	2268	610	R 1"	155.1	1	17294

* Specify pre-charge pressure when ordering.



Advantages

- Diaphragm: butyl rubber.
- The unique clench ring construction clamps the diaphragm between the two vessel halves.
- Nitrogen gas filling for longer maintenance of pre-pressure.
- The ribbed profile on the diaphragm prevents it from sticking to the inside wall of the vessel and ensures inflow of expansion water at the slightest increase in pressure.
- Uncoated water connection thread ensures easy and water tight installation.
- Top quality steel.

- Finished with a gleaming epoxy-powder coating.
- Each vessel is factory tested.

Technical information

- Maximum working pressure: 10.0 bar.
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum system temperature of 120 °C.
- Minimum/maximum temperature diaphragm: -10 / 90 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- In accordance with Pressure Equipment Directive 2014/68/EU.
- All welded construction.
- Red (RAL 3002) epoxy powder coating.
- Flexcon Top 110 - 300: including mounting kit.

Find more information online:

[Manuals](#)

[Certificates](#)

[Extra documentation](#)

Flamco Group
Plotterweg 31
3821 BB, Amersfoort - nl
T +31 33 299 75 00
F +31 33 298 64 45
E info@flamcogroup.com
I <https://flamcogroup.com>