

Product overview

- Miscellaneous accessories for sensors
- Mounting flange
- Tightening strap with contact fluid
- Immersion pockets, nickel-plated brass, for sensors
- Immersion pockets, stainless steel, for sensors




Types available

Type code	Type	Description
EXT-TN-1072525	SPB900	Tightening strap with contact fluid
EXT-TN-1072402	MF6	Mounting flange
EXT-TN-1072419	MF7	Mounting flange
EXT-TN-1070309	MF7 flex	Mounting flange
EXT-TN-1071313	MF19	Mounting flange
EXT-TN-1070316	THMS50	Immersion pocket, nickel-plated brass, length 50mm
EXT-TN-1066890	THMS120	Immersion pocket, nickel-plated brass, length 120mm
EXT-TN-1066883	THMS185	Immersion pocket, nickel-plated brass, length 185mm
EXT-TN-1070347	THMS300	Immersion pocket, nickel-plated brass, length 300mm
EXT-TN-1070354	THVA50	Immersion pocket, stainless steel, length 50mm
EXT-TN-1070361	THVA120	Immersion pocket, stainless steel, length 120mm
EXT-TN-1070378	THVA185	Immersion pocket, stainless steel, length 185mm
EXT-TN-1070385	THVA300	Immersion pocket, stainless steel, length 300mm

Tightening strap and contact fluid

Tightening strap and contact fluid (SB900)



- Accessory for contact sensors
- Syringe contact fluid 0.5mm³
- Tightening strap L=900mm



Mounting flange

Mounting flange D=6 / 7mm (MF6 / MF7)


- Suitable for mounting temperature sensors on air ducts
- Material brass, blue zincked
- Max. temperature 130°C
- Available for sensor bushings with a pipe diameter of 6mm and 7mm



Mounting flange (cont.)

**Mounting flange D=19mm
(MF19)**

- Suitable for mounting duct humidity and duct air quality sensor on air ducts
- Material PA6.6, color black

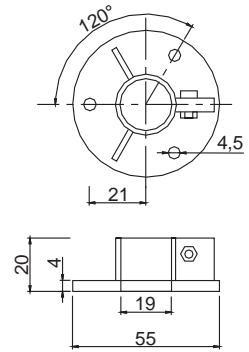


Immersion pocket

**Immersion pocket -
nickel-plated brass
(THMS)**

- For immersion temperature sensors AKF10 with D=7mm
- Hard soldered
- Pressure-proved up to 16bar
- Thread G1/2" DIN 2999
- Across flats SW22
- Max. temperature 130°C
- Mounting length

L	50	120	185	300
Sensor	62	135	192	320

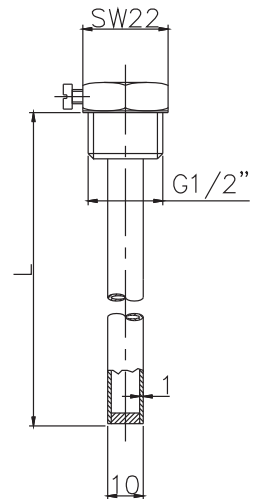

**Immersion pocket -
stainless steel
(THVA)**

- For immersion temperature sensors AKF10 with D=7mm
- Welded
- Pressure-proved up to 40bar
- Material 1.4571
- Thread G1/2" DIN ISO 228T1; undercut B; flat sealing
- Across flats SW24
- Max. temperature 260°C
- Mounting length

L	50	120	185	300
Sensor	62	135	192	320

