


Product Data Sheet (2019-06-12)

Flamco Clean V

For use in sealed heating and cooling systems.

Dirt separators protect the boilers, pumps and fittings from damage caused by the deposit of dirt particles. Dirt separators also offer benefits in the event of application in old systems or when an open system is converted to a closed system.

- Prevents deposit of dirt particles in the boiler.
- The removal of dirt particles from the system water extends the service life of pumps, control equipment and other system accessories.
- For mounting in vertical risers.

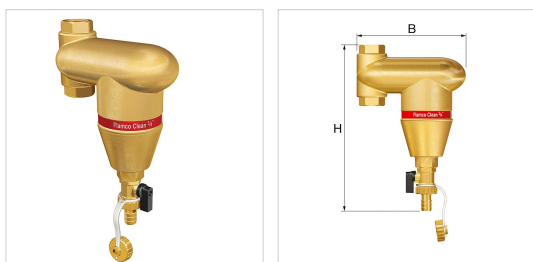

Type	Connection	Capacity [l]	Dimensions		Weight [kg]	###	Order Code
			B [mm]	H [mm]			
Flamco Clean V 22	22 mm	0.4	158	230	2.2	1	28039
Flamco Clean V 3/4	Rp 3/4"	0.4	158	223	2.2	1	28035
Flamco Clean V 1	Rp 1"	0.5	184	247	3.2	1	28036

Advantages

- With PALL-Ring technology.

Technical information

- Maximum working pressure: 10.0 bar
- Maximum working temperature: 120 °C.
- Maximum flow velocity: 1.5 m/s.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Brass housing, corrosion resistant internals.

Find more information online:

[Manuals](#)

[CAD drawings](#)

[Extra documentation](#)

Flamco Limited
Washway Lane
WA10 6PB, St Helens, Merseyside - gb
T 017 447 447 44
F 017 447 447 00
E info@flamco.co.uk
I flamcogroup.com/uk-en