




• **F-1130 SINGLE TURBINE •**
INSERTION FLOW METER
SCALED OUTPUT

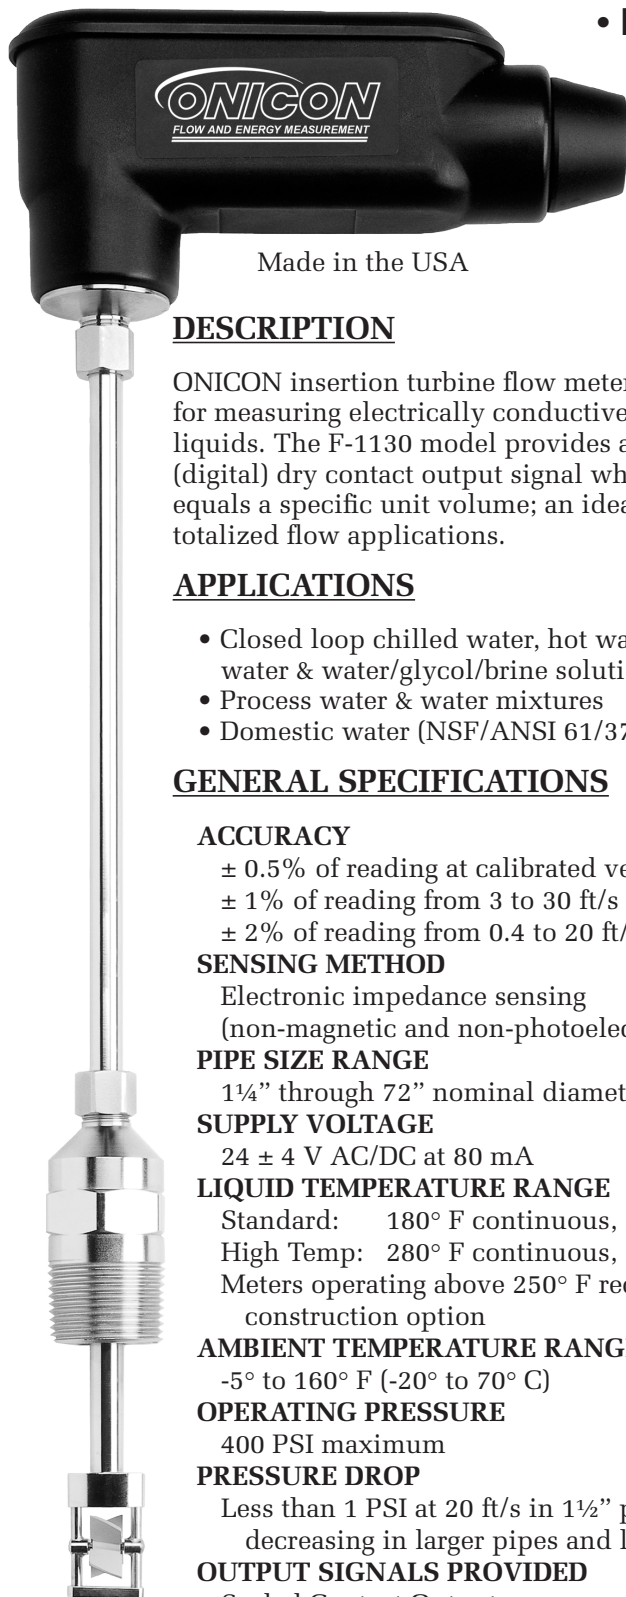

Made in the USA

DESCRIPTION

ONICON insertion turbine flow meters are suitable for measuring electrically conductive water-based liquids. The F-1130 model provides a scaled binary (digital) dry contact output signal where each pulse equals a specific unit volume; an ideal choice for totalized flow applications.

APPLICATIONS

- Closed loop chilled water, hot water, condenser water & water/glycol/brine solutions for HVAC
- Process water & water mixtures
- Domestic water (NSF/ANSI 61/372 version*)

GENERAL SPECIFICATIONS

ACCURACY

- ± 0.5% of reading at calibrated velocity
- ± 1% of reading from 3 to 30 ft/s (10:1 range)
- ± 2% of reading from 0.4 to 20 ft/s (50:1 range)

SENSING METHOD

Electronic impedance sensing
(non-magnetic and non-photoelectric)

PIPE SIZE RANGE

1¼" through 72" nominal diameter

SUPPLY VOLTAGE

24 ± 4 V AC/DC at 80 mA

LIQUID TEMPERATURE RANGE

Standard: 180° F continuous, 200° F peak
High Temp: 280° F continuous, 300° F peak
Meters operating above 250° F require 316 SS construction option

AMBIENT TEMPERATURE RANGE

-5° to 160° F (-20° to 70° C)

OPERATING PRESSURE

400 PSI maximum

PRESSURE DROP

Less than 1 PSI at 20 ft/s in 1½" pipe,
decreasing in larger pipes and lower velocities

OUTPUT SIGNALS PROVIDED

Scaled Contact Output
Isolated solid state dry contact
Contact rating: 100 mA, 50 V
Contact duration: 50 ms or 300 ms,
jumper selectable
Frequency Output
0 – 15 V peak pulse

(continued on back)

CALIBRATION

Every ONICON flow meter is wet calibrated in a flow laboratory against primary volumetric standards that are directly traceable to N.I.S.T. A certificate of calibration accompanies every meter.

FEATURES

Unmatched Price vs. Performance - Custom calibrated, highly accurate instrumentation at very competitive prices.

Excellent Long-term Reliability - Patented electronic sensing is resistant to scale and particulate matter. Low mass turbines with engineered jewel bearing systems provide a mechanical system that virtually does not wear.

Industry Leading Two-year "No-fault" Warranty - Reduces start-up costs with extended coverage to include accidental installation damage (miswiring, etc.) Certain exclusions apply. See our complete warranty statement for details.

Simplified Hot Tap Insertion Design - Standard on every insertion flow meter. Allows for insertion and removal by hand without system shutdown.

OPERATING RANGE FOR COMMON PIPE SIZES 0.17 TO 20 ft/s

±2% accuracy begins at 0.4 ft/s

Pipe Size (Inches)	Flow Rate (GPM)
1 ¼	0.8 - 95
1 ½	1 - 130
2	2 - 210
2 ½	2.5 - 230
3	4 - 460
4	8 - 800
6	15 - 1,800
8	26 - 3,100
10	42 - 4,900
12	60 - 7,050
14	72 - 8,600
16	98 - 11,400
18	120 - 14,600
20	150 - 18,100
24	230 - 26,500
30	360 - 41,900
36	510 - 60,900

F-1130 SPECIFICATIONS (cont.)

MATERIAL

Wetted metal components:

Standard: Electroless nickel plated brass

Optional: 316 stainless steel

Optional: NSF/ANSI 61/372 version*

ELECTRONICS ENCLOSURE

Standard: Weathertight aluminum enclosure

Optional: Submersible enclosure

ELECTRICAL CONNECTIONS


4-wire minimum for scaled switch output

Frequency output requires additional wires


Standard: 10' of cable with ½" NPT
conduit connection

Optional: Indoor DIN connector with 10'
of plenum rated cable

ALSO AVAILABLE



Display Modules




Btu Measurement
Systems

F-1130 WIRING INFORMATION

WIRE COLOR	DESCRIPTION	NOTES
RED	(+) 24 V AC/DC supply voltage, 30 mA	Connect to power supply positive
BLACK	(-) Common ground (Common with pipe ground)	Connect to power supply negative
GREEN	(+) Frequency output signal: 0-15 V peak pulse	Required when meter is connected to local display or Btu meter
GREY	Dry contact switch output	Scaled to provide one pulse per desired unit volume
VIOLET		

F-1130 WIRING DIAGRAM

Flow meter into control system (no display or Btu meter)

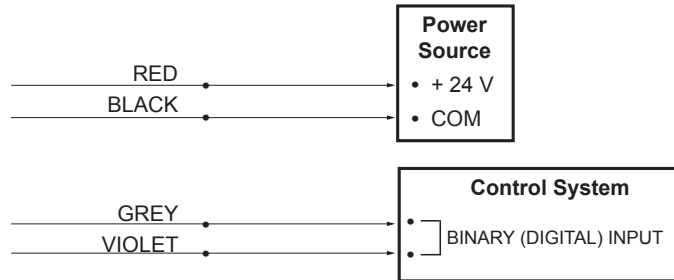


NOTE:

1. Black wire is common with the pipe ground (typically earth ground).
2. Frequency output required for ONICON display module or Btu meter, refer to wiring diagram for peripheral device.

* CLASSIFIED
UL US
WATER QUALITY
TURBINE INSERTION FLOW METER
NSF/ANSI 61 <MH60590>
ALSO CLASSIFIED
IN ACCORDANCE WITH
NSF/ANSI 372

TYPICAL METER INSTALLATION

(New construction or scheduled shutdown)

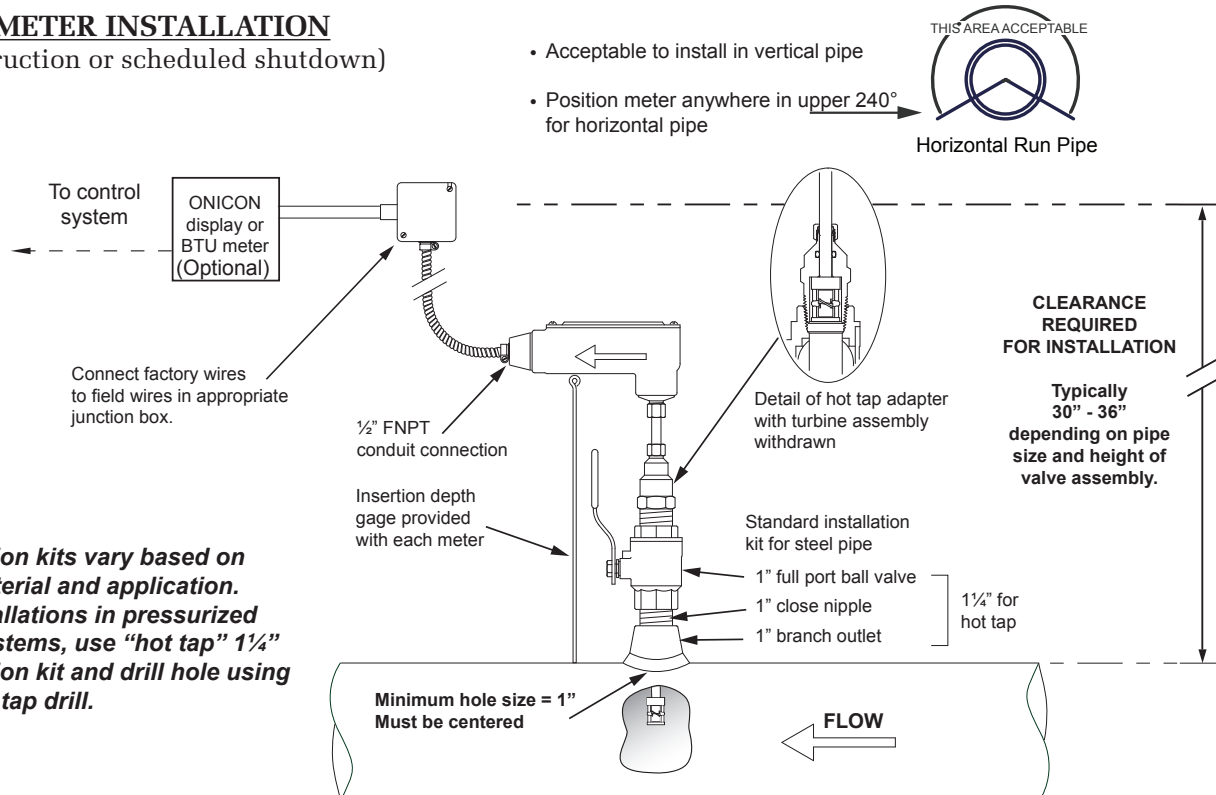

NOTE:

Installation kits vary based on pipe material and application. For installations in pressurized (live) systems, use "hot tap" 1¼" installation kit and drill hole using a 1" wet tap drill.