


Product Data Sheet (2020-10-06)

PS-T 600 - 2000

Buffer vessels for use in closed heating installations. Including two permanently welded-in heating coils for connecting additional heating sources (such as a solar installation or wood-burning stove).



Type	Capacity [l]	Dimensions *			Heating surface area [m ²] **	Weight [kg]	###	Order Code
		Ø [mm]	H [mm]	Tilting height [mm]				
PS-T 600	600	650	2050	2100	1.5 / 2.0	146	1	19353
PS-T 750	750	790	1800	1850	1.5 / 2.1	156	1	19354
PS-T 850	850	790	1950	2000	2.0 / 2.3	205	1	19355
PS-T 1000 (Ø790)	1000	790	2200	2250	2.2 / 2.7	245	1	19356
PS-T 1000 (Ø850)	1000	850	2000	2050	2.2 / 2.7	243	1	19357
PS-T 1200	1200	850	2250	2300	2.6 / 2.9	261	1	19358
PS-T 1500	1500	1000	2320	2380	2.8 / 3.2	306	1	19359
PS-T 2000	2000	1100	2350	2400	3.5 / 5.0	396	1	19360

* Dimensions excluding insulation.

** Upper/lower heating surface area.

Type	System connections	Distance from floor to connections								
		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	K [mm]	L [mm]	M [mm]
PS-T 600	8	180	280	730	880	980	1240	1280	1680	1830
PS-T 750	8	270	370	690	890	940	1060	1100	1420	1520
PS-T 850	8	270	370	740	920	970	1090	1200	1570	1670
PS-T 1000 (Ø790)	8	270	370	820	1010	1095	1210	1370	1820	1920
PS-T 1000 (Ø850)	8	305	405	790	1005	1075	1125	1220	1605	1705
PS-T 1200	8	305	405	855	1045	1195	1295	1405	1855	1955
PS-T 1500	8	340	440	890	1040	1230	1370	1440	1890	1990
PS-T 2000	8	350	450	900	1200	1310	1380	1450	1900	2000



Technical specifications	PS-T 600 - 2000							
	600	750	850	1000 Ø790	1000 Ø850	1200	1500	2000
Total heat loss (EN 12897) [W]	108	118	127	140	139	131	160	181
Energy label	C	C	C	C	C	C	C	C

Advantages

- Including adjustable feet for accurate levelling.
- Temperature sensor connections: G $\frac{1}{2}$ " (4x).
- Connections under a 90° angle, enabling an angular setting.

Technical information

- Maximum working pressure: 3 bar (buffer vessel) / 10 bar (heating coil).
- Maximum working temperature: 95 °C (buffer vessel) / 110 °C (heating coil).
- Steel vessel (made of S235JR): Outside powder-coated, inside untreated.
- Insulation (Excluded - Can be ordered separately (see Chapter 'Accessories for Water Heaters and Storage Vessels')): EPS insulating mantle (fire category B1) with a polypropylene outer shell in white (RAL 9010) / white aluminium (RAL 9006).

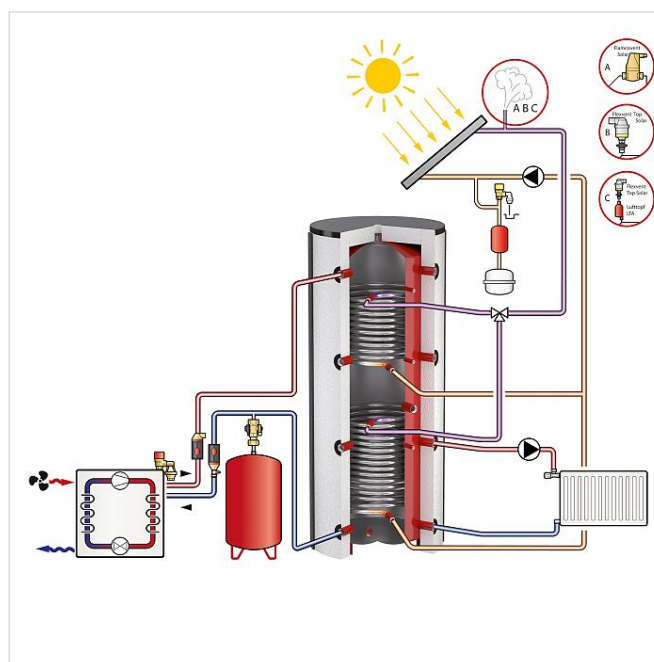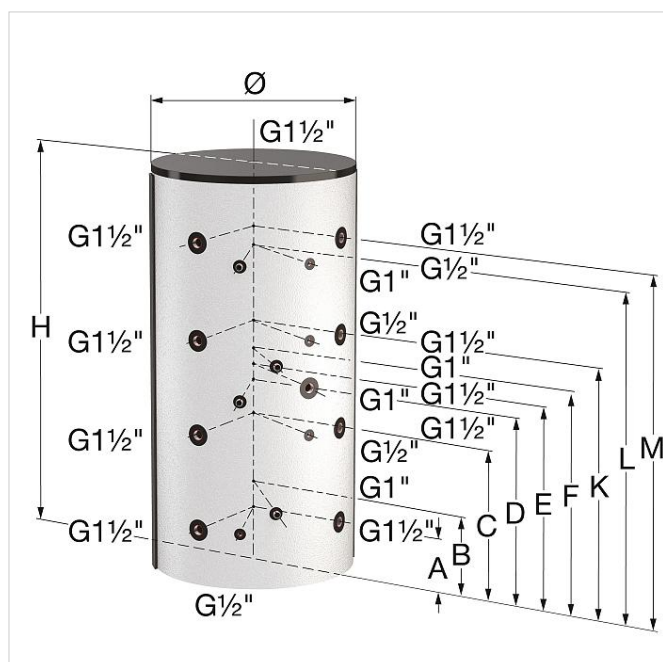

Find more information online:

- [Manuals](#)
- [CAD drawings](#)
- [Extra documentation](#)

Flamco Group
Plotterweg 31
3821 BB, Amersfoort - nl
T +31 33 299 75 00
E info@flamcogroup.com
I flamcogroup.com