


Product Data Sheet (2020-06-20)

Prescor SB

For protecting water heaters and potable water systems.

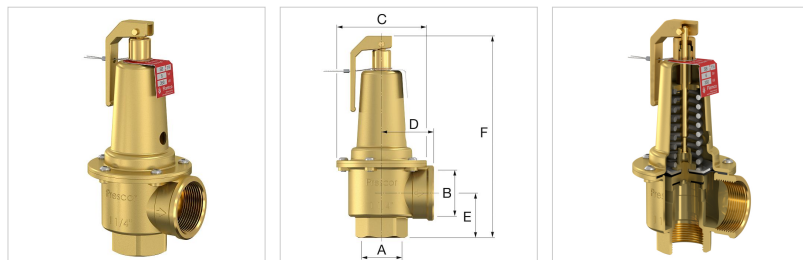

Type	Set pressure [bar]	Connection		Dimensions				Capacity [kW]	###	Order Code
		A	B	C [mm]	D [mm]	E [mm]	F [mm]			
Prescor SB 1 1/4	6.0	G 1 1/4" F	G 1 1/2" F	95	55	47	213	350	1	29008
Prescor SB 1 1/4	8.0	G 1 1/4" F	G 1 1/2" F	95	55	47	213	350	1	29009
Prescor SB 1 1/4	10.0	G 1 1/4" F	G 1 1/2" F	95	55	47	213	350	1	29010
Prescor SB 1 1/2	6.0	G 1 1/2" F	G 2" F	95	60	47	220	600	1	29011
Prescor SB 1 1/2	8.0	G 1 1/2" F	G 2" F	95	60	47	220	600	1	29012
Prescor SB 1 1/2	10.0	G 1 1/2" F	G 2" F	95	60	47	220	600	1	29013
Prescor SB 2	6.0	G 2" F	G 2 1/2" F	95	80	61	278	900	1	29015
Prescor SB 2	8.0	G 2" F	G 2 1/2" F	95	80	61	278	900	1	29016
Prescor SB 2	10.0	G 2" F	G 2 1/2" F	95	80	61	278	900	1	29017



Advantages

- Wide range so that the correct valve can be selected appropriate to the application.
- Can be used in combination with any storage boiler system.
- Because of the "pop" effect these valves have a high blow-off capacity.
- Solid brass housing.
- Valve seat with silicon free rubber seal.
- Anti-ageing steel spring maintains the set pressure accurately.
- With silicon free diaphragm that prevents moisture and dirt from getting into the moving parts.
- Construction and choice of materials are your guarantee of accuracy and safety.

Technical information

- Minimum/Maximum working temperature: 0 °C / 95 °C.
- Peak load: 140 °C.
- In accordance with PED 2014/68/EU and EN 12516-3.

Find more information online:

[Manuals](#)

[Certificates](#)

[CAD drawings](#)

[Extra documentation](#)

Flamco Group
Plotterweg 31
3821 BB, Amersfoort - nl
T +31 33 299 75 00
F +31 33 298 64 45
E info@flamcogroup.com
I <https://flamcogroup.com>