

Product Data Sheet (2019-07-20)

Prescor BFP BA

Backflow preventer Prescor BFP type BA suitable for installations with liquid class 4.



Type	DN (syst.)	Connection (B)	Dimensions			Vessel capacity [l]	Ball valves (2x)	Weight [kg]	###	Order Code
			A [mm]	C [mm]	D [mm]					
Prescor BFP BA ½ M	15	G ½" M	171	105	175	≤ 3500		0,83	1	27400
Prescor BFP BA G ¾ M Unit	15	G ¾" M	288	105	175	≤ 3500	•	1,46	1	27402
Prescor BFP BA K15 Unit	15	K 15	351	105	175	≤ 3500	•	1,52	1	27406





Type	Order Code	Flamcomat (G3)		Flamcomat Starter	
		Pump units	Vessels	Pumps units	Vessels
Prescor BFP BA ½ M	27400	MM - M130, DM - D130	FG & FB 100 - 3500	M02 - M10, D02 - D10	100 - 600
Prescor BFP BA G ¾ M Unit	27402	MM - M130, DM - D130	FG & FB 100 - 3500	M02 - M10, D02 - D10	100 - 600
Prescor BFP BA K15 Unit	27406	MM - M130, DM - D130	FG & FB 100 - 3500	M02 - M10, D02 - D10	100 - 600

Advantages

- Low pressure drop.
- Lowest sound class: ≤ 20 dB(A) according to DIN-52 218 Group I.
- Easy to install both horizontally and vertically.
- Provided with strainer.
- Smallest in its class.
- Complete set.

Technical information

- Material: brass, SST, plastic and EPDM.
- Working temperature: 1 °C / 65 °C.
- Nominal design pressure: PN 10.

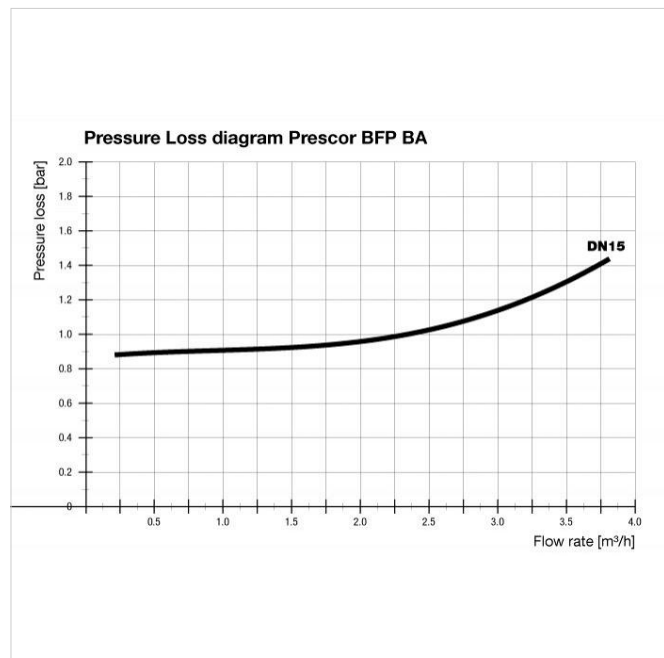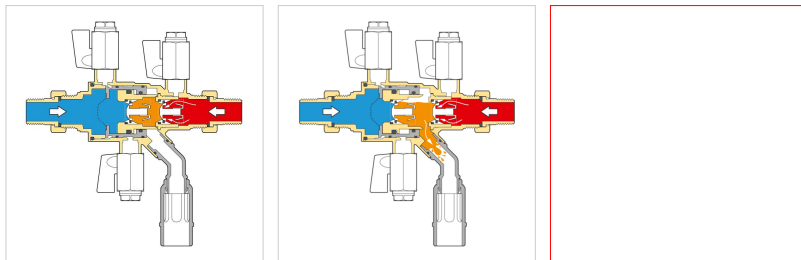

Find more information online:

[Manuals](#)

[Extra documentation](#)

Flamco Group
 Plotterweg 31
 3821 BB, Amersfoort - nl
T +31 33 299 75 00
F +31 33 298 64 45
E info@flamcogroup.com
I <https://flamcogroup.com>