



Valve

Paratech builds the reliability, we guarantee

Valve



PARATECH UL/FM valves are designed to conform to the international standard with most compact and competitive size. The simple and light design products are also available for the customers who pursue the most reliable and economical fire sprinkler system.

Alarm check Valve




UL / FM Product

■ Specification

Model No. FAVB Series	100R	100H	150R	150H	200R Flange	200R Grooved
Approved Standards	UL/FM	FM	UL/FM	FM	UL/FM	UL/FM
Max Pressure (PSI)	175	300	175	300	250	250
Test Pressure (PSI)	350	600	350	600	500	500
Direction	Vertical					
Flange / Grooved Standard	ANSI B16.1 FF Class 150					ANSI/AWWA C606
Weight (Kg)	38,6	46,4	56,2	70,6	76,5	57,6
Packing (ea)	1	1	1	1	1	1

* Note: 100H & 150H UL Listing in progress

■ Assembly Diagram



■ Dimension

Model No	Size											
	A	B	C	D	E	F	G	H	I	J	K	L
FAVB 100R	100	175	210	24	250	169	415	8-19D	376	50A	50	153
FAVB 100H	100	200	254	32	266	169	415	8-22D	376	50A	50	153
FAVB 150R	150	240	280	26	280	199	480	8-23D	391	50A	50	153
FAVB 150H	150	270	318	37	301	199	480	12-22D	391	50A	50	153
FAVB 200R Flange	200	298	343	28,5	350	255	650	8-23D	500	50A	75	320
FAVB 200R Grooved	200	214	219	350	255	75	650	500	320	50A	-	-

■ Part List

NO	ITEM	MATERIAL	NO	ITEM	MATERIAL
1	Body	"Cast Iron (4", 6") Ductile Iron (4", 4"H, 6", 6"H, 8")"	7	Retarding Chamber	SPCC/SPPS
2	Cover	"Cast Iron (4", 6") Ductile Iron (4", 4"H, 6", 6"H, 8")"	8	Pressure Switch	-
3	Seat Ring	Bronze	9	Drain Valve	"Cast Iron/Brass Ductile Iron/Brass"
4	Disc & Arm	STS 304	10	Alarm Test Valve	Brass
5	Disc Seat	"Viton(4", 6") EPDM(4"H, 6"H, 8")"	11	Alarm Shut-off Valve	Brass
6	Seat Cover	STS 304			



FAVB 100R-UL/FM



FAVB 200R-(Groove)UL/FM

Paratech builds the reliability, we guarantee

Retard Chamber Type



■ Specification

Model No	Standard Type		Combined Type	
	A2-RC-100	A2-RC-150	A2-RC-100U	A2-RC-150U
Size	100A	150A	100A	150A
Max. Pressure	1.4 MPa			
Test Pressure	2.0 MPa			
Direction	Vertical			
Flange	KS B1511 10K			
Weight(Kg)	18	34.4	18.3	34.3
Packing(Ea)	1	1	1	1



※ Combined Type : Combined Sight Glass and Alarm Check Valve.

■ Assembly Diagram

(Standard Type)



(Combined Type)



■ Dimension

Model No	Size	A	B	C	D	E	F
A2-RC-100		380	275	230	490	25A	—
A2-RC-150		440	300	280	550	25A	—
A2-RC-100U		380	175	230	490	195	25A
A2-RC-150U		450	215	280	550	205	25A

■ Part List

NO	Part	Material	Qty	NO	Part	Material	Qty
1	Alarm Valve Body	GCD450	1	5	Retard Chamber	—	1
2	Alarm Switch	DC 24V	1	6	Drain Valve	—	1
3	Pressure Gauge (Inlet)	—	1	7	Sight Glass	—	1
4	Pressure Gauge (Outlet)	—	1	8	Alarm Test Valve	—	1



A2-RC-100U
(Combined Type)

Valve



A2-65
(Standard)



A2-65
(Combine Type)


Alarm switch Type

■ Specification

Model No	A2-65	A2-80	A2-100	A2-150
Size	65A	80A	100A	150A
Max. Pressure	1.4MPa			
Test Pressure	2.0MPa			
Direction	Vertical			
Flange	KS B1511 10K			
Weight(Kg)	11.7	12.3	15.3	32
Packing(Ea)	1	1	1	1

※ Combined Type : Combined Sight Glass and Alarm Check Valve.

■ Assembly Diagram

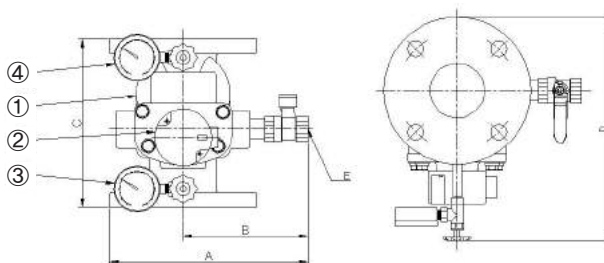

■ Dimension

Model No / Size	A	B	C	D	E
A2-65	255	167	200	295	25A
A2-80	270	177	220	305	25A
A2-100	290	185	230	325	25A
A2-150	360	220	280	400	25A

■ Part List

NO	Part	Material	Qty
1	Alarm Valve Body	GCD 450	1
2	Alarm Switch	DC 24V	1
3	Pressure Gauge (Inlet)	—	1
4	Pressure Gauge (Outlet)	—	1

Paratech builds the reliability, we guarantee




A2-65-G

Grooved Type

■ Specification

Model No	A2-G-65	A2-G-80	A2-G-100	A2-G-150
Size	65A	80A	100A	150A
Max. Pressure	1,4MPa			
Test Pressure	2,0MPa			
Direction	Vertical			
Grooved Pipe	KS B1507 10K			
Weight(Kg)	5,7	6,0	7,6	16,4
Packing(Ea)	1	1	1	1

■ Assembly Diagram

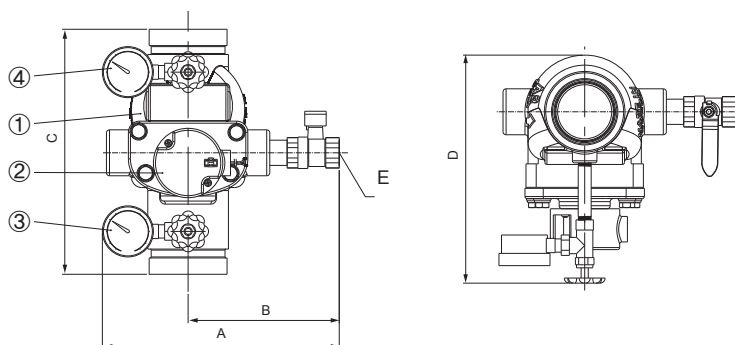

■ Dimension

Size	A	B	C	D	E
Model No					
A2-G-65	255	167	240	215	25A
A2-G-80	265	177	250	230	25A
A2-G-100	290	175	260	240	25A
A2-G-150	345	220	310	300	25A

■ Part List

NO	Part	Material	Qty
1	Alarm Valve Body	GCD 450	1
2	Alarm Switch	DC 24V	1
3	Pressure Gauge (Inlet)	—	1
4	Pressure Gauge (Outlet)	—	1

Valve



PPD100-UL/FM


Pre-Action & Deluge Valve

UL / FM Product

■ Specification

Model No	PPD100-UL/FM	PPD150-UL/FM
Size	100A	150A
Max. Pressure	175PSI	
Test Pressure	350PSI	
Pressure Loss	0.02MPa	
Direction	Vertical	
Flange Size	ANSI 150lb FF Type	
Weight(Kg)	59	79
Packing(Ea)	1	1

■ Assembly Diagram

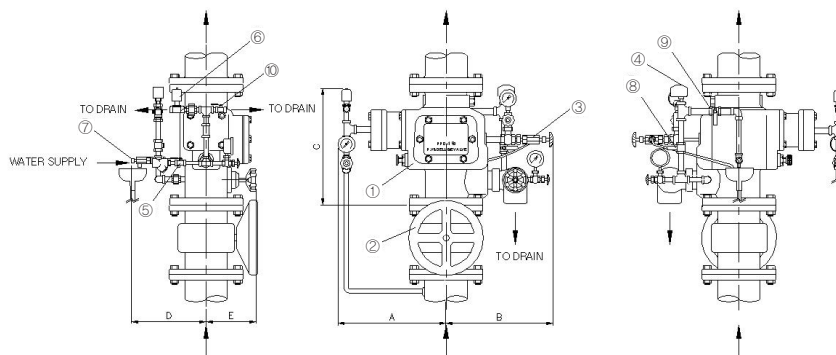

■ Dimension

Model No \ Size	A	B	C	D	E
PPD100-UL/FM	243	260	367	270	150
PPD150-UL/FM	259	285	372	290	150

■ Part List

NO	Part	Material	NO	Part	Material
1	Body/Cover	Cast Iron	6	Solenoid Valve	—
2	OS&Y Valve	—	7	Drip Check Valve	—
3	Air Control Valve	—	8	PS Test Valve	—
4	Pressure Switch	—	9	PS Signal Control Valve	—
5	Water Supply Valve	—	10	Manual Valve	—

Paratech builds the reliability, we guarantee


■ Specification

Model No	P1-10K-80A	P1-10K-100A	P1-10K-150A	P1-16K-100A	P1-16K-150A	P-1-10K-150A-G
Size	80A	100A	150A	100A	150A	150A
Max. Pressure		1.4Mpa		2.2Mpa		1.4Mpa
Test Pressure		2.0Mpa		3.2Mpa		2.0Mpa
Direction				종형		
Connection				KS B 1511(Flange)		
						KS B 1507 (Groove)
Weight(Kg)	30.3kg	31.1kg	48.1kg	34.5kg	54.7kg	35.8kg
Packing(Ea)	1	1	1	1	1	1



P1-10K-150

■ Assembly Diagram

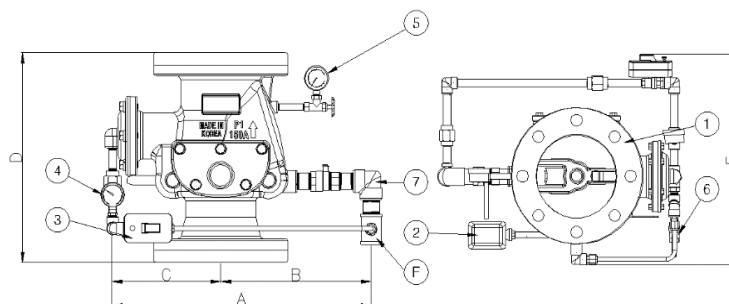

■ Dimension

Model No	Size	A	B	C	D	E	F
P1-10K-80		470	270	200	304	470	25A
P1-10K-100		470	270	200	304	470	25A
P1-10K-150		520	290	230	374	470	25A
P1-16K-100		470	270	200	304	470	25A
P1-16K-150		520	290	230	374	470	25A
P1-10K-150A-G		520	290	230	374	470	25A



P1-10K-150
(Grooved Type)

■ Part List

No	Part	Material	Q'ty
1	Pre-Action Valve Body	GCD450	1
2	Alarm Switch	—	1
3	Electric Control Valve	—	1
4	Pressure Gauge (Inlet)	—	1
5	Pressure Gauge (Outlet)	—	1
6	Setting Valve	—	1
7	Drain Valve	—	1

Valve


Double Interlock Valve

■ Specification



Model No	DI-P1-10K-150
Size	150A
Max. Pressure	1.4MPa
Test Pressure	2.0MPa
Direction	Vertical
Flange Size	KS B1511
Weight(Kg)	51.1
Packing(Ea)	1

■ Assembly Diagram

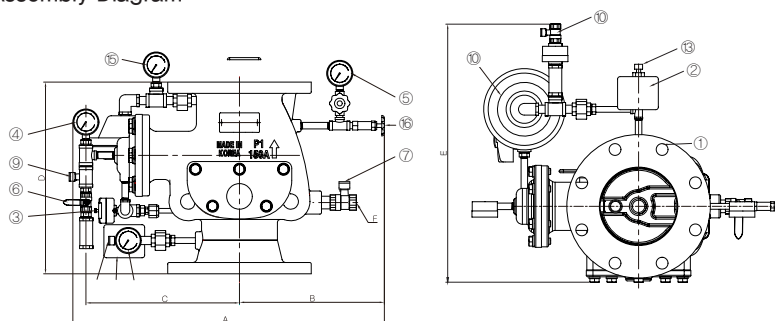

■ Dimension

Model No \ Size	A	B	C	D	E	F
DI-P1-10K-150	650	310	300	374	560	25A

■ Part List

NO	Part	NO	Part
1	Valve Body	9	Manual Control Valve
2	Pressure Switch(Low)	10	Air Supply Valve
3	Electric Control Valve	11	Pressure Gauge (Inlet)
4	Pressure Gauge (Setting)	12	Pressure Gauge (Outlet)
5	Pressure Gauge (Outlet)	13	Drip Check Valve
6	Water Supply Control Valve	14	Actuator
7	Drain Valve	15	Air Pressure Valve
8	Pressure Switch(High) Test Valve	16	Air Control Valve

Paratech builds the reliability, we guarantee

Dry Pipe Valve


■ Specification

Model No	PLDPV 100	PLDPV 150
Size	100A	150A
Max. Pressure	1.4MPa	
Test Pressure	2.0MPa	
Pressure Loss	0.02MPa	
Direction	Vertical	
Flange Size	KS B1513 10K	
Weight(Kg)	61	81
Packing(Ea)	1	1



PLDPV 100

■ Assembly Diagram

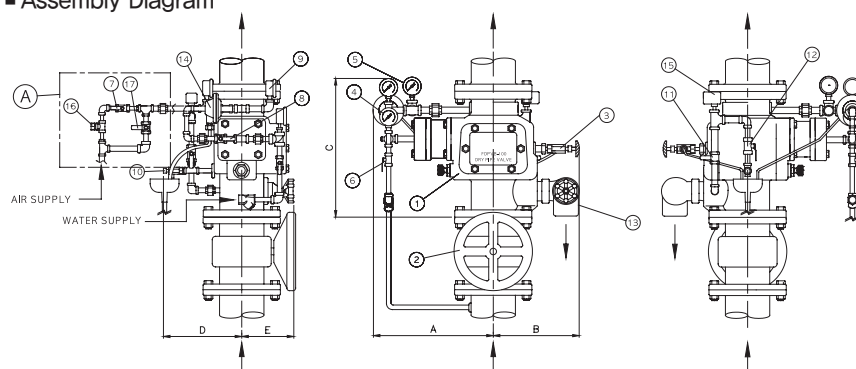

※ A is Optional

■ Dimension

Model No	Size	A	B	C	D	E
PLDPV 100		261	255	443	270	150
PLDPV 150		278	280	490	290	150

■ Part List

NO	Part	NO	Part
1	Dry Pipe Valve	10	Drip Check Valve
2	OS & Y Valve	11	Pressure Switch Test Valve
3	Air Control Valve	12	Ball Valve
4	Priming Water Supply-Valve	13	Drain Valve
5	Actuating Unit Air Supply-Valve	14	Actuator
6	Actuating Unit Water Supply-Valve	15	Pressure Switch
7	Air Supply-Valve	16	Pressure Control Valve
8	Actuating Unit Water Stop Valve	17	Air Supply-Valve
9	Pressure Gauge		

Valve



FBVW(G)-300

Wafer Resilient Butterfly Valve
Gear Operated, with Tamper Switch



FBVG(G)-300

Grooved Resilient Butterfly Valve
Gear Operated, with Tamper Switch



FBVL(G)-300


Lugged Wafer Resilient Butterfly
Valve Gear Operated, with Tamper
Switch

Butterfly Valve

UL / FM Product

- Valve Body: Ductile Iron ASTM A536, 65–45–12
- Disc: Ductile iron + EPDM Coating
- Stem: Stainless Steel, Two-Piece Stem Design
- Gear box: Ductile Iron ASTM A536, 65–45–12
- Epoxy Coating Color: RAL3000
- Pressure Rating: 300PSI

■ Assembly Diagram

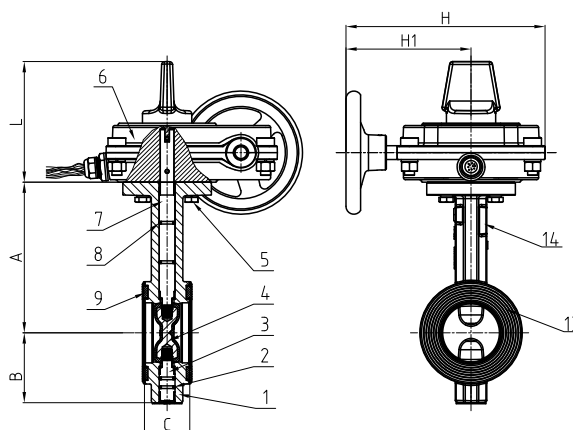

■ Part List

NO	Part	MATERIAL	QTY
1	BODY	ASTM A536, 65–45–12	1
2	O-Ring	NBR	2
3	Stub Shaft	SS431	1
4	Disc	ASTM A536, 65–45–12+EPDM	1
5	Hex Nut	Carbon Steel Zinc plated	4
6	Signal Gearbox	Body: ASTM A536, 65–45–12	1
7	Drive Shaft	SS431	1
8	O-Ring	NBR	2
9	End Face Seal	EPDM	2

■ Dimension

Inch	mm	A	B	C	L	H1	H
2"	50	140.5	65	43±2±	122.5	127	202.2
2.5"	65	153	71	46±2	122.5	127	202.2
3"	80	157.5	81	46±2	122.5	127	202.2
4"	100	176	95	52±2	122.5	127	202.2
5"	125	191	111	56±2	122.5	127	202.2
6"	150	202.5	133	56±2	122.5	127	202.2
8"	200	243.5	164	60±2	122.5	185	260.2
10"	250	273	196	68±2	122.5	185	260.2
12"	300	311	226	78±2	132	202.5	297.5


Paratech builds the reliability, we guarantee

Resilient OS&Y Gate Valve

UL / FM Product

- Valve Body: ASTM A536, 65–45–12
- Resilient Wedge Disc: ASTM A536, 65–45–12+EPDM
- O-Ring: NBR
- Stem: Stainless Steel
- Bonnet Gasket: EPDM
- Bonnet: ASTM A536, 65–45–12
- Yoke: ASTM A536, 65–45–12
- Gland: ASTM A536, 65–45–12
- Handwheel: ASTM A536, 65–45–12
- Epoxy Coating Color: RAL3000
- Pressure Rating: 300PSI

■ Assembly Diagram

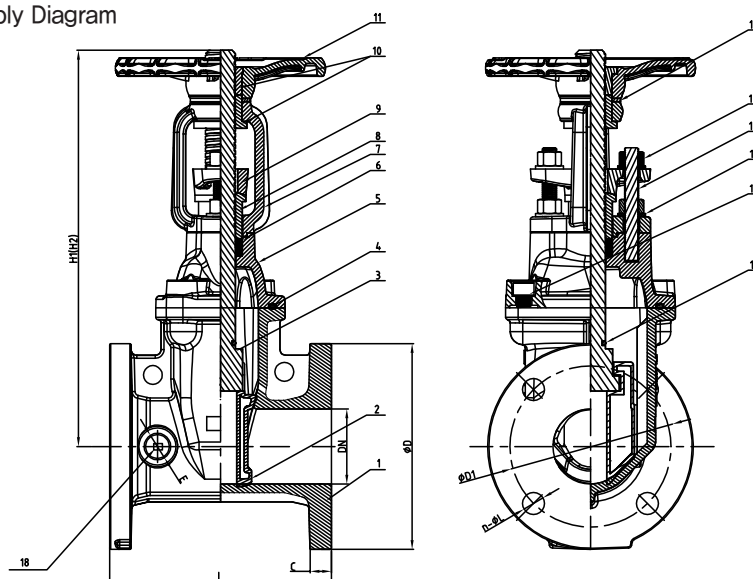

■ Part List

NO	Part	MATERIAL
1	Valve Body	ASTM A536, 65–45–12
2	Resilient Wedge disc	ASTM A536, 65–45–12+EPDM
3	Stem	Stainless Steel 2Cr13
4	Bonnet Gasket	EPDM
5	Bonnet	ASTM A536, 65–45–12
6	Packing	EPDM
7	Yoke	ASTM A536, 65–45–12
8	Stem Bushing	Brass C22000
9	Gland	ASTM A536, 65–45–12
10	Stem nut	Brass C22000
11	Handwheel	ASTM A536, 65–45–12
12	Washer	C22000
13	Gland Nut	Carbon steel Zinc Plated
14	Stud	Carbon steel Zinc Plated
15	Flat Washer	Carbon steel Zinc Plated
16	Bolt	Carbon steel Zinc Plated
17	O-Ring	NBR
18	Plug	C89833

■ Dimension

DN		Dimensions(mm)						
Inch	mm	L	H1(Close)	H2(Open)	D	D1	C	n-ØL
2"	50	178	348	400	152	120.7	18	4-Ø19.1
2.5"	65	190	373	440	178	139.7	17.5	4-Ø19.1
3"	80	208	408	490	191	162.4	19.1	4-Ø19.1
4"	100	229	471	573	229	190.5	19.1	8-Ø19.1
5"	125	254	541	565	254	215.9	19.1	8-Ø22.2
6"	150	267	601	755	279	241.8	19.1	8-Ø22.2
8"	200	292	774	975	343	298.5	22.2	8-Ø22.2
10"	250	330	1029	1283	406	362	23.8	12-Ø25.4
12"	300	356	1065	1370	483	431.8	25.4	12-Ø25.4
14"	350	381	1210	1560	533	476.3	25.4	12-Ø28.6
16"	400	406	1280	1680	597	539.8	25.4	12-Ø28.6
18"	450	432	1760	2210	635	577.9	25.4	16-Ø31.8
20"	500	457	1760	2280	609	635	28.6	20-Ø31.8
24"	600	508	1950	2550	813	740.3	30.1	20-Ø34.9



FGVB(O)-300
Flange Type



FGVG(O)-300
Grooved Type



FGVM(O)-300
Flange x Grooved

Valve




Resilient NRS Gate Valve

UL / FM Product

- Valve Body: ASTM A536, 65–45–12
- Resilient Wedge Disc: ASTM A536, 65–45–12+EPDM
- O-Ring: NBR
- Stem: Stainless Steel
- Bonnet: ASTM A536, 65–45–12
- Gland: ASTM A536, 65–45–12
- Handwheel: ASTM A536, 65–45–12
- Bonnet Gasket: EPDM
- Epoxy Coating Color: RAL3000
- Pressure Rating: 300PSI

■ Assembly Diagram

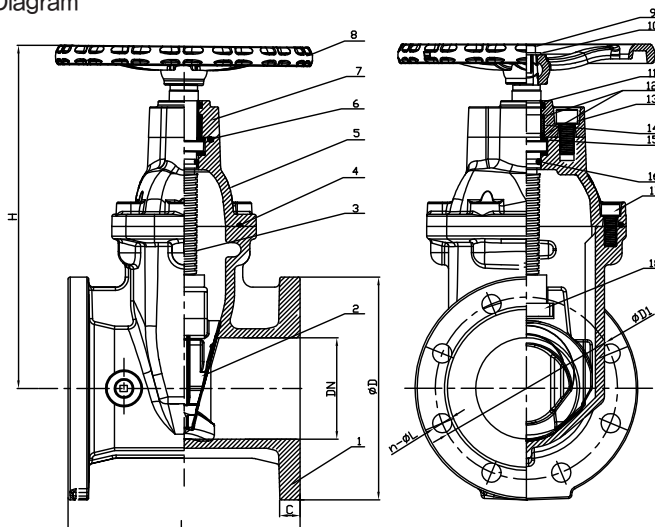

■ Part List

NO	Part	MATERIAL
1	Valve Body	ASTM A536, 65–45–12
2	Resilient Wedge disc	ASTM A536, 65–45–12+EPDM
3	Stem	AISI 431
4	Bonnet Gasket	EPDM
5	Bonnet	ASTM A536, 65–45–12
6	O-Ring	NBR
7	Gland Flange	ASTM A536, 65–45–12
8	Handwheel	ASTM A536, 65–45–12
9	Bolt	Carbon steel Zinc Plated
10	Flat Washer	Carbon steel Zinc Plated
11	Ring Wiper	EPDM
12	O-Ring	NBR
13	Bolt	Carbon steel Zinc Plated
14	Axis guide	Brass HPb59–1
15	Washer	Brass HPb59–1
16	O-Ring	NBR
17	Bolt	Carbon steel Zinc Plated
18	Wedge nut	Brass HPb59–1

■ Dimension

DN		Dimensions(mm)					
Inch	mm	L	H	D	D1	C	n-ØL
2"	50	178	254	152	120.7	16	4-Ø19.1
2.5"	65	190	275	178	139.7	17.5	4-Ø19.1
3"	80	208	301	191	152.4	19.1	4-Ø19.1
4"	100	229	355	229	190.5	19.1	8-Ø19.1
5"	125	254	393	254	215.9	19.1	8-Ø22.2
6"	150	267	448	279	241.3	19.1	8-Ø22.2
8"	200	292	548	343	298.5	22.2	8-Ø22.2
10"	250	330	626	406	362	23.8	12-Ø25.4
12"	300	356	722	483	431.8	25.4	12-Ø25.4
14"	350	381	917	533	476.3	25.4	12-Ø28.6
16"	400	406	917	597	539.8	25.4	12-Ø28.6
18"	450	432	1108	635	577.9	25.4	16-Ø31.8
20"	500	457	1130	699	635	28.6	20-Ø31.8
24"	600	508	1311	813	749.3	30.1	20-Ø34.9



FGVB(N)-300
Flange Type



FGVG(N)-300
Grooved Type



FGVB(N)-300
Flange Type With Post Flange



FGVGP(N)-300
Groove Type With Post Flange

Paratech builds the reliability, we guarantee

Check Valve

UL / FM Product

- Valve Body: ASTM A536, 65–45–12
- Resilient Wedge Disc: ASTM A536, 65–45–12+EPDM
- O-Ring: NBR
- Stem: Stainless Steel
- Bonnet Gasket: EPDM
- Bonnet: ASTM A536, 65–45–12
- Yoke: ASTM A536, 65–45–12
- Gland: ASTM A536, 65–45–12
- Handwheel: ASTM A536, 65–45–12
- Epoxy Coating Color: RAL3000
- Pressure Rating: 300PSI

■ Dimension

DN		PN (PSI)	Dimension(mm)					
Inch	mm		L	D	D1	b	n-d	H
2"	50	300	203	152	120.5	16	4-Ø19.1	133
2 1/2"	65	300	254	178	139.5	17.5	4-Ø19.1	150
3"	80	300	278	191	152.5	19	4-Ø19.1	160
4"	100	300	330	229	190.5	24	8-Ø19.1	218
6"	150	300	406	279	241.5	25.5	8-Ø22-2	290
8"	200	300	495	343	298.5	28.5	8-Ø22-2	330
10"	250	300	622	406	362	30.5	12-Ø25.4	350
12"	300	300	660	483	432	32	12-Ø25.4	376



FGVM(O)-300
Flange Type

FCHBF(S)-300
Face-To-Face w/
ASME B16.10 CL125



FCHG(S)-300
Groove Type

FCHGD(S)-300
Big Drain Hole



FSYB
Flange Type




FSYG
Groove Type

Strainer

UL Product

- Valve Body: Ductile Iron ASTM A536, 65–45–12
- Screen: AISI 304
- Rigid Coupling: Ductile Iron ASTM A536, 65–45–12
- Cap: Ductile Iron ASTM A536, 65–45–12
- Plug: Malleable Iron Galvanized
- Epoxy Coating Color: RAL3000/EY3009M
- Pressure Rating: 300PSI

■ Assembly Diagram

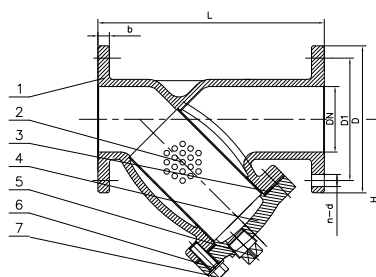

■ Part List

NO	Part	MATERIAL
1	Valve Body	ASTM A536, 65–45–12
2	Screen	SIAI 304
3	Gasket	EPDM
4	Cover	ASTM A536, 65–45–12
5	Plug	Malleable iron galvanized
6	Bolt	Carbon steel Zinc Plated
7	Flat Washer	Carbon steel Zinc Plated

Valve



FBVT(G)-175
Vertical Indicator
Post used for
Gate Valve with
Post Flange



FIPW
Indicator Port

Indicator Post

UL / FM Product

- Body: Cast Iron ASTM A126 Class B
- Base Flange: Cast Iron ASTM A126 Class B
- Standpipe: Carbon Steel ASTM A53
- Window Class: Plexiglass
- Locking Wrench: ASTM A536, 65–45–12
- Epoxy Coating Color: RAL3000
- Pressure Rating: 300PSI



■ FBVT(G)-175 Part List

NO	Component	Material
1	Hex Nut	Carbon Steel Zinc Plated
2	Hex Bolt	Carbon Steel Zinc Plated
3	Socket	ASTM A536, 65–45–12
4	Cotter Pin	AISI 304
5	Base Flange	Cast Iron ASTM A126 Class B
6	Hex Bolt	Carbon Steel Zinc Plated
7	Hex Nut	Carbon Steel Zinc Plated
8	Standpipe	Carbon Steel ASTM A53
9	Stem 1 Square	Carbon Steel AISI 1045
10	Body	Cast Iron ASTM A126 Class B
11	Locking Wrench	ASTM A536, 65–45–12
12	Target Carrier Nut	AISI 304
13	Hex Bolt	Carbon Steel Zinc Plated
14	Hex Nut	Carbon Steel Zinc Plated
15	Hex Bolt	Carbon Steel Zinc Plated
16	Instructs the plane	Cast Aluminium
17	Window Class	Plexiglass
18	Gasket	PTFE
19	Operating NUT	AISI 304
20	Top Section	Cast Iron ASTM A126 Class B
21	Snap Ring	Stainless Steel AISI 1066
22	Plug	Malleable iron Galvanized
23	Square Nut	Carbon Steel Zinc Plated
24	Hex Bolt	Carbon Steel Zinc Plated

■ FIPW Part List

NO	Component	Material
1	Body	Cast Iron ASTM A126 Class B
2	Plug	Malleable iron Galvanized
3	Square Nut	Carbon Steel Zinc Plated
4	Hex Bolt	Carbon Steel Zinc Plated
5	Cover	Cast Iron ASTM A126 Class B
6	Hand wheel	ASTM A536, 65–45–12
7	Eye Bolt	Carbon Steel ASTM A307B
8	Washer	Carbon Steel ASTM A307B
9	Snap Ring	Stainless Steel AISI 1066
10	Operating NUT	AISI 304
11	Gasket	PTFE
12	Window Class	Plexiglass
13	Instructs the plane	Cast Aluminium
14	Hex Bolt	Carbon Steel Zinc Plated
15	Hex Bolt	Carbon Steel Zinc Plated
16	Hex Nut	Carbon Steel Zinc Plated
17	Target Carrier Nut	AISI 304
18	Hex Nut	Carbon Steel Zinc Plated
19	Hex Bolt	Carbon Steel Zinc Plated
20	Stem 1 Square	Carbon Steel AISI 1045
21	Cotter Pin	AISI 304
22	Socket	ASTM A536, 65–45–12

■ Assembly Diagram

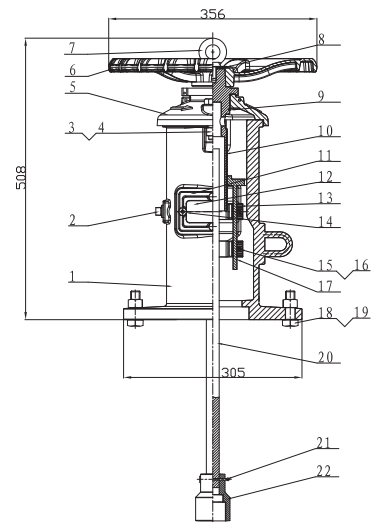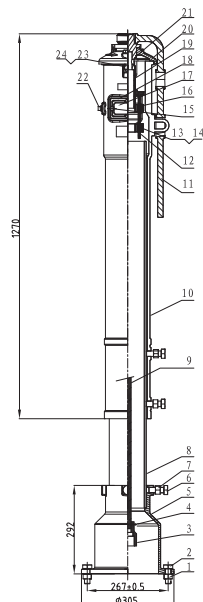

Cautions

1. Insulate the valves and accessories to prevent freezing damage in the cold winter.
2. Clean up inside of valves and accessories after installation to prevent the sprinkler system damage.
3. Install the proper pipe with specified diameter for secondary side.
4. Drain water in the pipe of secondary side before opening the valve cover for repair or clean up.
5. Follow the manual for electrical wiring.



Paratech builds the reliability, we guarantee



PHOA-15



PHOA-25

Sight Glass

■ Specification

Model No	PHOA-15	PHOA-25
Size	15A	25A
K Value (Reference 0.1MPa)	K=80	K=80
Direction	Vertical or Horizontal	Vertical or Horizontal
Weight(g)	390	360
Valve Size	Alarm Valve 65A-150A	Alarm Valve 65A-150A
Screw Size	Inlet : PT $\frac{1}{2}$ " / Outlet : PT $\frac{1}{2}$ "	Inlet : PT1 " / Outlet : PT $\frac{1}{2}$ "
Surface finishing	Red Painting	Red Painting
Length	106mm	75mm



Water Motor Gong

■ Part List

No	Part	Material	No	Part	Material	No	Part	Material
1	Upper cover	AL	7	Connector pipe	Zinc plated steel	13	Frame	AL
2	Screw	Carbonize steel	8	Screw	Brass	14	Plug	Carbonize steel
3	Seal gasket	Mild sheet	9	Impeller jacket	AL	15	Spring gasket ring	Carbonize steel
4	Impeller	Nylon	10	Wheel	Polyester	16	Body	AL
5	Axes jacket	Nylon	11	Rotate axes	Nylon	17	Install board	Carbonize steel
6	Axes	AL	12	Screw	Carbonize steel			

• Working Pressure : 1.2MPa



Relief Valve

■ Specification

Model No	PRV-8-10	PRV-8-12	PRV-8-14
Size		8A	
Pressure Settings	1.0 MPa	1.2 MPa	1.4 MPa
Test Pressure		2.0 MPa	
Temperature Rating		Max. 80 ° C	
Application		Water Pressure	
Direction		Vertical or Horizontal	
Valve Size		Alarm Valve (65A-150A)	
Screw Size		Inlet : PT $\frac{1}{4}$ " / Outlet : PT $\frac{1}{4}$ "	
Weight		178g	
Length		73mm	

PARATECH

Headquarters · Factory

30-21, Gilju-Ro, 425 Beon-Gil, Wonmi Gu,
Bucheon Si, Kyoungki Do, Korea
TEL : +82-32-675-2288(Rep.)
FAX : +82-32-675-6297

Seoul Office

8, Uisadang-Daero,
Yeongdeungpo-Gu, Seoul, Korea
TEL : +82-2-745-2300(Rep.)
FAX : +82-2-3785-0093(International Business Team)
Home Page: www.paratech.co.kr
www.fesco.co.kr